

48 " Genesis Series Range, Griddle Manual with Oven

■ G 48 2ST - 24B 24G



Model G 48 2ST - 24B 24G



100% manufactured from raw materials providing the highest quality and durability.

STANDARD FEATURES

- 3-year parts and labor warranty
- 14 gauge fully welded interlocking frame
- 7 " stainless steel belly rail
- Metal chrome insulated Knobs
- 6 " stainless steel, adjustable legs

RANGE

- KI Award Winning High Efficiency Burners (VT Burner Technology)
- Standing pilot for open top burners
- Heavy duty 12" x 12" removable cast iron grates
- Stainless steel front and sides
- Front main manual gas shut-off valve

GRIDDLE

- Stainless steel front, sides and splash guards
- Fully welded griddle plate
- Control of the burner allowing the best heat distribution in the industry
- Stainless steel grease trough
- No cold zone or hot spot
- Heavy, highly polished ¾ " griddle plate

- Easy access to burner box
- Burner, designed to achieve the best performance with 25,000 BTU/h

OVEN

- 60,000 BTU/h (total) oven with snap action thermostat adjustable for 175 °F to 550 °F (79.4 °C to 287.7 °C)
- Stainless-steel oven cavity (top, bottom and side)
- Fully welded stainless steel seamless oven door
- Heavy duty oven wired rack – 3/16 " diameter
- 26 ½ " Standard bakery depth on all ovens
- Spark ignition for oven
- 5 shelf positions and 4 racks standard

OPTIONS & ACCESSORIES

- Modular belly rail accessory for 1/6 pans
- Cutting Board
- (4)6" swivel casters with front locking brakes
- Oven Rack
- Quick disconnect (3/4 Flex hose quick disconnect 4' long)
- 4" Stub Back
- 36.6" Double Shelf

SPECIFICATIONS

- Manifold pressure is 4 " W.C. (Natural Gas) or 10 "W.C. (Propane Gas)
- 6 " stainless steel, adjustable legs.
- ¾ " NPT rear gas connect and pressure regulator for both natural gas and propane

RANGE

- Removable 18,000 BTU/h VT Burners providing maximum control , best heat distribution and efficiency in the industry
- Each burner is controlled by a gas valve for independent control of flame. One standing pilot services each burner

GRIDDLE

- 25,000 BTU/h burner, providing best performance
- One standing pilot services the burner
- Heavy, highly polished ¾ " griddle plate
- Control of the burner by a gas valve for independent control of flame allowing the best heat distribution in the industry
- Stainless steel grease trough

OVEN

- 30,000 BTU/h burners
- One standing pilot services the each burner




48 " Genesis Series Range, Griddle Manual with Oven

Rev 02 (Dez/2019)

VENANCIO USA 48 " Genesis Series Range, Griddle Manual with Oven

■ G 48 2ST - 24B 24G

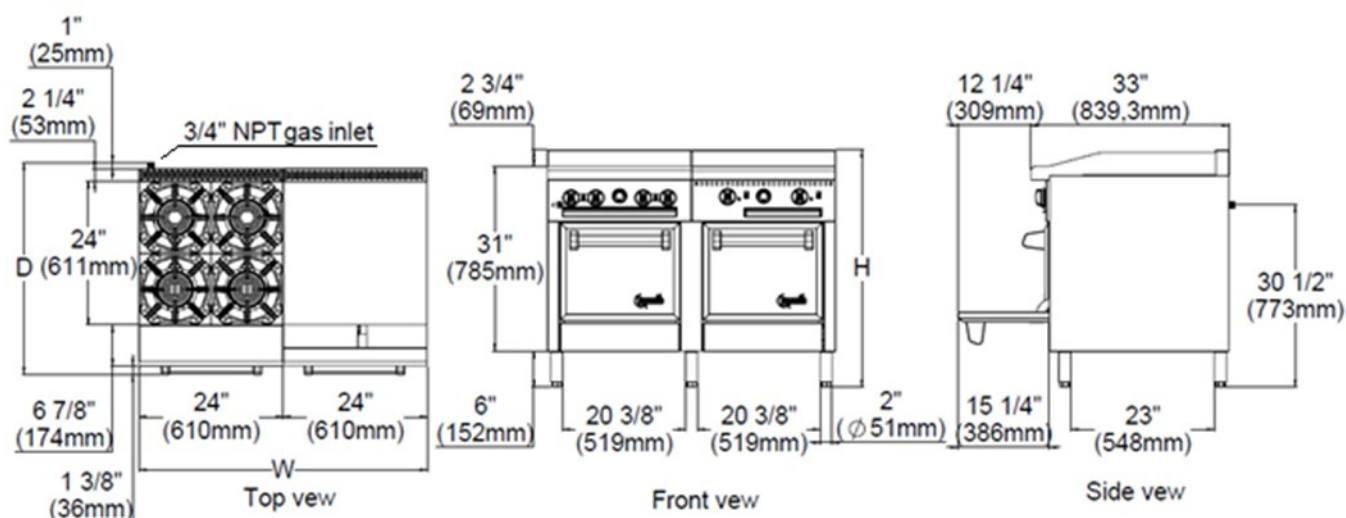

Model	Exterior Product Dimensions & Weight				Shipping Crate Dimensions & Weight			
	Width	Depth	Height	Weight	Width	Depth	Height	Weight
G482ST-24B24G	48 " (1,220 mm)	35 3/16 " (894 mm)	39 5/8 " (1,006 mm)	772 lb (350 Kg)	52 5/32 " (1,325 mm)	38 3/8 " (975 mm)	46 7/8 " (1,190 mm)	882 lb (400 Kg)

Model	Oven Interior					
	Width		Depth		Height	
G482ST-24B24G	18 1/2 " (469.9 mm)	18 1/2 " (469.9 mm)	26 1/2 " (673.1 mm)	26 1/2 " (673.1 mm)	14 " (355.6 mm)	14 " (355.6 mm)

UTILITY INFORMATION

GAS SUPPLY

Model	Burners (Range)	Gas (BTU/h)		Burners (Griddle)	Gas (BTU/h)		Burners (Oven)	Gas (BTU/h)		Manifold Pressure	
		Natural	Propane		Natural	Propane		Natural	Propane	Natural Gas	Propane gas
G482ST-24B24G	4	72,000	72,000	2	50,000	50,000	2 *	60,000	54,000	4 " W.C.	10 " W.C.

- 3/4" NPT rear Gas inlet
- Specify elevation, If over 2000 ft
- LP conversion kit included

CLEARANCES REQUIREMENTS

- Provide side and rear clearance 0 "(0 mm) from non-combustible surfaces. 6 " (152.4 mm) - sides and, 8 " (203.2 mm) - rear, clearance from combustible surfaces.

MISCELLANEOUS

- Install under vented hood.
- Check local codes for fire, installation and sanitary regulations
- Intended for commercial use only. Not for household use

VENANCIO USA
3146 John P Curci Dr.
Unit 12 Hallandale Beach,
FL 33009, USA

1 954 367 7846
sales@venanciousa.com
venanciousa.com

Venancio continuously improves the design of its products, therefore reserves the right to change specifications at any time without prior notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

